

AMAX panel 3000

www.boschsecurity.com



BOSCH
Invented for life




- ▶ 32 hardwired zones / 8 areas / 128 user codes
- ▶ 3 x 256 events log stamped with date and time
- ▶ On-board voice dialer
- ▶ Macro functionality
- ▶ USB direct connection

This panel is designed for residential and small to medium-sized businesses. It offers 32 zones and 8 areas and comes with an enclosure and a transformer. An on-board PSTN dialer transmits an alarm via the common telephone network to a phone and / or a communication center while at the same time a voice message is sent to the owner's landline or mobile phone to inform him about an intruder's presence. Commissioning the system is simple and involves minimum programming: the default settings already cover 90 % of the available functionality. Programming can either be done via the AMAX TEXT, LCD and LED keypads or via the programming software (A-Link Plus).

The intrusion system can be used with both RADION wireless peripherals, operating at 433 Mhz and hardwired detectors from Bosch.

System overview

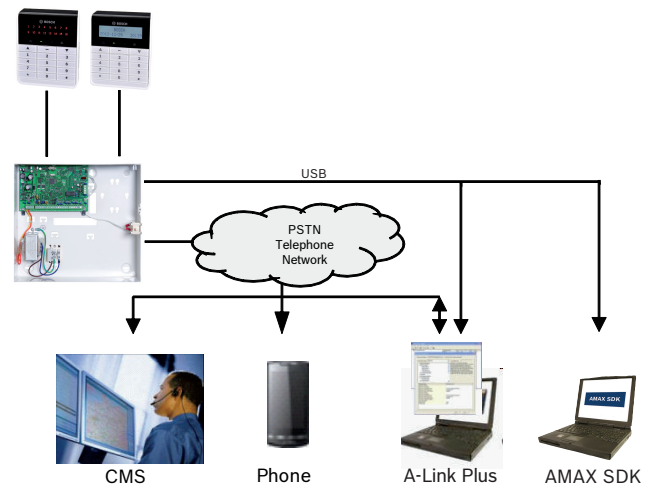

Functions

Basic functions

- Keypad code STAY / AWAY arming
- One button STAY / AWAY arming
- On-board dialer with CID / SIA transmission format. Voice dialer transmits up to 4 recorded messages to landline/mobile phones in case of an alarm. Messages

can be recorded with A-Link Plus and sent to the control panel with the remote programming software A-Link Plus

- 16 weekly schedules with the option to add exceptions in the calendar
- 3 programmable macros: several single functions from the keypad are combined to one customer macro function, can be executed by pressing one button
- Remote maintenance operations (e.g. walk test, bypassing)
- Installer can enable the service mode for comfortable programming without having alarms or outputs triggered
- In multi-area set-up (direct and multiple arming), "area status" is displayed
- Area name is displayed on the master or area text keypad
- 4 on-board outputs (two monitored)
- Up to three output event types can be configured for one physical output
- Every zone except zone 1 can be used with four-wire fire detectors
- Any zone can be used for chime mode (door bell)
- Any zone can be used to detect a sensor tamper (DEOL)
- Zones can be bypassed by name
- Test mode for outputs and zones

Optional functions

- Wireless devices (433 MHz) RADION from Bosch
- Zone inputs on extension modules (with DX2010)
- Relay outputs on extension modules (with DX3010)
- Connect outdoor sirens and IP cameras to an optional 8 relay module (DX3010)
- Programming key

Optional alarm transmission

- IP communication with Bosch Conettix IP, SIA DC09 UDP and SIA DC 09 TCP protocols via B426 and B450 with B442 or B443 modules
- GPRS communication with Bosch Conettix IP, SIA DC09 UDP and SIA DC 09 TCP protocols via B450 with B442 or B443 module

Optional remote programming via A-Link Plus

- IP communication (B426 and B450 with B442 or B443 modules)
- GPRS communication (B450 with B442 or B443 module)

Optional video alarm verification

Optional video alarm verification is possible in combination with a DX3010 8 relay module and an IP camera with an analogue alarm input and a relay output. The live video verification ensures a location check and false alarm reduction via internet from every location worldwide. This means that you or the monitoring center can get alarm notification in order to detect the exact location where the alarm was triggered and if a real intruder is present.

Communication with Bosch Software Packages

The AMAX system can communicate with the following software packages:

Remote programming software A-Link Plus

The AMAX system can be accessed and programmed via the remote programming software A-Link Plus. All control panel and status information are accessible and an operation of the AMAX panel from a remote location is possible.

A-Link Plus can connect to the AMAX panel via USB, IP or modem.

AMAX SDK (software development kit)

AMAX SDK is a Windows DLL (dynamic link library) used to integrate AMAX panel information into 3rd party software. AMAX SDK integrates the AMAX panel functionalities and enables receiving AMAX panel data with a 3rd party system management software.

AMAX SDK can connect to the AMAX panel via USB or IP.

Compatibility information

Basic	
PSTN communicator (integrated)	Formats: Contact ID, SIA DC 03
Magnetic contacts	All magnetic contacts, including recessed, terminal connection, miniature over-head door, and surface mount.
Intrusion detectors	All conventional intrusion detectors, including Blue Line, seismic, PIR, TriTech, photoelectric and TriTech PIR Microwave.
Four-wire smoke detectors	Conventional 12V smoke, heat and photoelectric smoke detectors.
Optional	
Zone	DX2010 zone input module
Relays	DX3010 output module
IP communicator	B426 and B450 with B442 or B443 modules
GPRS/GSM communicator	B450 with B442 or B443 module

Assorted literature is available. Refer to the appropriate datasheet, brochure, and installation manuals for additional data.

Availability varies according to sales region.

Certifications and approvals

Region	Certification	
Germany	VdS	H116003 AMAX RADION
Europe	CE	AMAX panel 2100, AMAX panel 3000
	EN5013 1	EN-ST-000166 ICP-AMAX2-P2-EN, ICP-AMAX2-P3-EN, ICP-AMAX3-P2-EN, ICP-AMAX3-P3-EN

Region	Certification	
Belgium	INCERT	B-509-0063 a AMAX panel 4000 EN
Sweden	SBSC	14-524 ICP-AMAX3-P3-EN
France	AFNOR	1223400002A0 ICP-AMAX3-P2-EN, ICP-AMAX3-P3-EN

Parts included

Qty.	Description
1	AMAX panel 3000 including integrated PSTN communicator
1	Enclosure
1	Transformer
1	Tamper switch
1	Terminal block for power supply
1	Hardware accessory pack: EOL resistors
1	Operation Manual

Technical specifications

Electrical

Power supply type	EN = A
-------------------	--------

Transformer

Transformer input in VAC	230
Transformer output in VAC	18
Transformer AC power in VA	20
Transformer fuse in mA	500

AC input

Minimum operating voltage in VDC	195
Maximum operating voltage in VDC	253
Line voltage frequency in Hz	50

DC output

DC output maximum current for all components in mA	1100
DC output maximum current for all components: dependency on battery	<ul style="list-style-type: none"> Battery 7Ah standby 12h (recharge Batt 80% in 72h) = 550mA Battery 7Ah standby 36h + 15min alarm current 500mA (recharge Batt 80% in 72h) = 150mA

Aux 1 / 2 output

Aux 1 / 2 output voltage	+12V / GND
--------------------------	------------

Aux 1 / 2 nominal output voltage under AC line input in VDC	13.8 (+3% / -5%)
Aux 1 / 2 output max. Vpp in mV	675
Aux 1 / 2 output voltage range under AC line input in VDC	12.82 – 13.9
Aux 1 / 2 output current in mA	500

Outputs

PO -1 / PO -2 maximum supervised output current in mA	500
PO -3 maximum current in mA	100

Option bus

Option bus nominal output voltage under AC line input in VDC	13.8 (+3% / -5%)
Option bus output voltage range under AC line input in VDC	13.11 – 14.2
Option bus 1 maximum current in mA	500
Panel PCB maximum quiescent current in mA	100

Battery

Battery type	12V / 7 Ah Bosch D 126
Low battery condition in VDC	below 11.0
Minimum battery condition in VDC	10.8

Mechanical

Dimension in cm (H x W x D)	26.0 x 28.0 x 8.35
Weight in g	1950

Panel features

Number of zones	32
Number of users	128
Number of events	256 history events, stamped with time, and date 256 EN history events, stamped with time, and date 256 dialer history events, stamped with time, and date
Pin code variations	1000000

Number of devices

Number of keypads	8
Number of DX 2010 modules	3
Number of DX 3010 modules	2

Number of DX 4010 modules	1
Number of GPRS modules: B450 with B442 or B443, DX4020-G	1
Number of IP modules: B426	2 (1 if 1 of the GPRS modules above is connected)
Number of RF receivers	1
Number of RADION RF repeaters	8
Number of RF sensors	32
Number of DSRF RF keyfobs	24
Number of RADION RF keyfobs	128

Zones

Zone 1	Single or dual end-of-line (EOL 2,2K Ω) NC, NO
Zone 2 - 16 COM	7 Single or dual end-of-line (EOL 2,2K Ω) NC, NO
Tamper	Enclosure tamper input (does not reduce point capacity)

Option bus

Dimensions in mm	4 wire, \varnothing 0.6 - 1.2
Maximum cable length in m	200 (panel to last keypad)
Maximum bus length in m	700 (maximum 14 devices, maximum 8 keypads)

Environmental

Minimum operating temperature in °C	-10
Maximum operating temperature in °C	55
Minimum relative humidity in %	10
Maximum relative humidity in %	95
Protection class	IP 30, IK 06

Ordering information

AMAX panel 3000

Language package 1: English, Polish, Turkish
Not certified according to European standards
Order number **ICP-AMAX3-P1**

AMAX panel 3000 EN

Language Package 2: French, German, Dutch, Portuguese
Order number **ICP-AMAX3-P2-EN**

AMAX panel 3000 EN

Language Package 3: English, Spanish, Polish, Swedish
Order number **ICP-AMAX3-P3-EN**

AMAX panel 3000 BE

Language Package 2: French, German, Dutch, Portuguese
Certified according to INCERT standards
Order number **ICP-AMAX3-P2-BE**

Accessories

AMAX keypad 2000 D8

AMAX keypad 2000 D8, 8 zones LCD icon keypad
Order number **IUI-AMAX-LCD8**

AMAX keypad 3000 L8

AMAX keypad 3000 L8 is a 8 zone LED keypad
Certification: EN 50131-3 Grade 2
Order number **IUI-AMAX3-LED8**

AMAX keypad 3000 L16

AMAX keypad 3000 L16 is a 16 zone LED keypad
Certification: EN 50131-3 Grade 2
Order number **IUI-AMAX3-LED16**

AMAX keypad 4000 T

AMAX keypad 4000 T, LCD text keypad, two lines with each 18 characters
Order number **IUI-AMAX4-TEXT**

AMAX mainboard 3000 P4

Mainboard for AMAX panel 3000
Language package 4: English, French, Spanish, Portuguese
Order number **ICP-AMAX3-PCBP4**

DX2010 Input Expander

Zone expansion module with 8 DOEL zone inputs
Order number **DX2010**

DX3010 Octo-output Expander

Package includes only the DX3010 board
Order number **DX3010**

AE20EN Enclosure

AE20EN plastic enclosure for DX2010/DX3010
Order number **AE20EN**

B426 Ethernet Communication Module

Supports two-way communications over Ethernet networks for compatible control panels
Order number **B426**

B450 Conettix Plug-in Communicator Interface

Supports two-way IP communication over commercial cellular networks using a plug-in cellular communicator for compatible control panels
Order number **B450**

B442 Conettix Plug-in GPRS Cellular Communicator

Multi-function cellular communicator that provides IP communication over a (GPRS) cellular network
Order number **B442**

B443 Conettix Plug-in HSPA+ Cellular Communicator

Multi-function 3G/4G cellular communicator providing IP communication over a GPRS/EDGE/UMTS/HSPA+ cellular network

Order number **B443**

ICP-EZPK Programming Key

Blue key for transferring configurations to and from Easy Series and AMAX panels

Order number **ICP-EZPK**

ICP-EZRU2 ROM Update Key

Green key for upgrading the panel firmware

Order number **ICP-EZRU-0106**

Represented by:

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
emea.securitysystems@bosch.com
emea.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.boschsecurity.com

North America:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.us

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia