



L'Énergie Sans Limite !  
Safe Energy for Life !



## Company networks; Service industries



From 600 to 2000 VA

The range of E2 LCD was designed to offer your networks and professional IT applications reliable and high-performance protection against power supply problems and dangerous electrical disturbances.

### High-performance protection

The On Line Performance technology controlled by microprocessor makes the E2 LCD an ideal protection solution thanks to its perfect sinusoidal current and fully protected output. It also provides effective protection for particularly sensitive loads such as servers or even video surveillance, telephone switchboards, VOIP etc.

In the event of a power cut, E2 LCD offers up to 60 min. of backup time therefore ensuring uninterrupted service or critical data backup.

### Smart features

The built-in charger takes only 4 hours to reach maximum backup capacity. When the UPS is not powered up, the cold startup function enables emergency starting of connected hardware. When power is restored the UPS automatically starts up again and does not require any operator input.

### Energy saving features



The battery automatically recharges when there is mains power and the UPS is OFF. This feature, available for the whole range, ensures that when connected devices are not in use and the UPS is OFF, the battery continues recharging. Real energy savings are achieved thanks to its advanced battery charger which enables the batteries to charge twice as fast as normal.

### Designed for ease of use

- A single On/Off switch
- LCD screen and audible alarms indicating UPS status



E2 LCD 600 & 800



E2 LCD 1000



E2 LCD 1500 & 2000



Online Performance Technology



4 to 6 protected UPS outlets




USB communication port  
(USB cable included)



Up to 60 min. backup time\*  
\*Depending on the model and the connected load

## CONNECTION

1. Integrated power cable
2. Power input
3. IEC protected outlets
4. Input fuse
5. RJ11/45 connectors
6. USB port
7. Circuit breaker
8. RS232 port

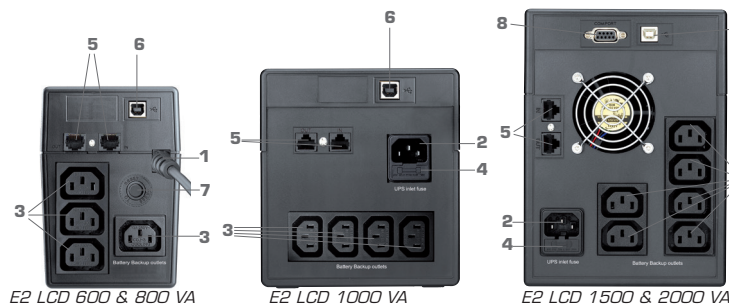

From 600 to 2000 VA

## TECHNICAL CHARACTERISTICS

E2 LCD 600	E2 LCD 800	E2 LCD 1000	E2 LCD 1500	E2 LCD 2000
------------	------------	-------------	-------------	-------------

### GENERAL SPECIFICATIONS

Technology	On Line Performance controlled by microprocessor				
Power	600 VA	800 VA	1000 VA	1500 VA	2000 VA
Power factor	0.6	0.6	0.7	0.7	0.7
IEC outputs with backup time	4			6	
Tel./ADSL line protection	RJ11/45 (1-IN/1-OUT)				

### PROTECTION & FILTERING

Output form	Pure sinusoidal		
Protection	Discharge / overload / overvoltage + Tel./ADSL line		
Input protection	Circuit breaker	Fuse	
Overvoltage protection	Phase-Neutral protection: 1 kV; Phase-Ground & Neutral-Ground protection: 2 kV		

### PHYSICAL CHARACTERISTICS

Dimensions - LxWxH (mm)	145 x 100 x 330		160 x 146 x 350	205 x 146 x 397	
Net weight (kg)	5.2	6	9	11,6	12,25

### INPUT TECHNICAL CHARACTERISTICS

Voltage	[110-120 VAC] or [220/230/240 VAC]*
Voltage range	[81-145 VAC] or [162-290 VAC]*
Frequency	50/60 Hz (auto-detection)

### OUTPUT TECHNICAL CHARACTERISTICS

Voltage	[110-120 VAC] or [220/230/240 VAC]*
Automatic voltage regulation	± 10%
Frequency	50 or 60 Hz ± 1Hz

### BATTERY

Battery charger	Automatic battery charging upon connection to the mains				
Cold startup (no mains)	yes				
Battery type & number	12 V/7 Ah x 1	12 V/9 Ah x 1	12 V/7 Ah x 2	12 V/9 Ah x 2	12 V/10 Ah x 2
Recharging time	4-6 hours at 90% after total discharge		10 hours at 90% after total discharge		
Backup time	From 12 to 60 min, depending on the connected load				

### DISPLAY

LCD screen	Mains power supply mode, battery mode, output charge level, battery level, input voltage, output voltage, overload, fault and battery low
------------	---

### AUDIBLE ALARM

Battery mode	Sounding every 10 seconds
Low battery mode	Sounding every second
Overload	Sounding every half second
Battery replacement	Sounding every 2 seconds
Fault	Continuous sounding

### COMMUNICATION

USB communication port	Yes	
RS232 communication port	-	Yes
Communication software	InfoPower (supports Windows® 2000/2003/XP/Vista/2008, Windows® 7, 8, Linux, Unix et MAC)	

### ENVIRONMENT

Ideal environment	0-40°C, 0-90% relative humidity (without condensation)		
Noise level	< 40 dB	< 45 dB	< 55 dB

### NORMS

Standard	CE RoHS	
Electromagnetic compatibility	EN 62040-2 / IEC 61000-4-2 / IEC 61000-4-3 / IEC 61000-4-4 / IEC 61000-4-5 / IEC 61000-2-2	
Low voltage safety	EN 62040-1-1 / IEC 60950-1	

### SALES INFO

Warranty	2 years				
Gencods	3700085 65348 7	3700085 65349 4	3700085 65350 0	3700085 65351 7	3700085 65352 4

\* Low voltage (110V) and High voltage (230V) are different products

## Communications solutions and remote management

USB & RS232 communication ports

Software :

- Simple user interface
- UPS startup and shutdown programming
- Data and events record enabling daily maintenance
- E-mail messaging to manage UPS status at all times via the local network
- Free download from the website

## Packaging content

E2 LCD 600 & 800:

- 1 integrated input cable
- 2 IEC output cables
- 1 RJ11 cable
- 1 USB cable
- 1 user manual

E2 LCD 1000:

- 2 IEC output cables
- 1 RJ11 cable
- 1 USB cable
- 1 user manual

E2 LCD 1500 & 2000:

- 3 IEC output cables
- 1 RJ11 cable
- 1 USB cable
- 1 user manual

## Warranty

2-year warranty against manufacturing defects under normal conditions and compliance with precautionary measures.

Warranty to be taken out on our website within 10 days of purchase.



## Infosec Communication

4, rue de la Rigotière  
44700 ORVAULT - FRANCE

Sales contact

Tél : 02 40 76 11 77  
sales@infosec.fr

www.infosec-ups.com



©2016 Infosec Communication, all rights reserved. Infosec UPS System is a trademarks or registered trademark of Infosec Communication. All other trademarks or registered trademarks belong to their respective owners. Photos are not binding. Specifications are subject to change without prior notice. Backup time is only a guide: actual duration may vary depending on the temperature, battery condition and peripherals added. UPS are part of electronic and electric equipments category. At the end of their lives, they have to be collected separately. 02.16 AA.XX.111.08