

# Professional Series TriTech+ Curtain Motion Detectors with Anti-mask

www.boschsecurity.com



**BOSCH**  
Invented for life



- ▶ 30 m x 2.6 m (100 ft x 8.5 ft) standard coverage
- ▶ EN50131-2-4 Grade 3 compliant
- ▶ Sensor data fusion technology
- ▶ Tri-focus optics technology
- ▶ Range adaptive radar

The ISC-PDL1-WAC30x Professional Series TriTech+ Curtain Detectors with Anti-mask are exceptionally suited for commercial indoor applications. MANTIS anti-mask technology makes obscuring the detector view nearly impossible for intruders. Sensor data fusion technology ensures that the detector sends alarm conditions based on precise information. Tri-focus optics eliminate coverage gaps and respond efficiently to intruders. The powerful combination of unique features in the Professional Series delivers superior catch performance and virtually eliminates false alarms.

The self-locking two-piece enclosure, built-in bubble level, flexible mounting height, and three optional mounting brackets simplify installation and reduce service time.

## Functions

### Sensor data fusion technology

Sensor data fusion technology is a unique feature that uses a sophisticated software algorithm to gather signals from five sensors: two pyroelectric sensors, a range adaptive radar sensor, a room temperature

sensor, and a white light level sensor. The microcontroller analyzes and compares the sensor data to make the most intelligent alarm decisions in the security industry.

### Tri-focus optics technology

Tri-focus optics technology uses optics with three specific focal lengths: long-range coverage, middle-range coverage, and short-range coverage. The detector applies the three focal lengths to 14 detection zones, which combine to make a solid curtains of detection. Tri-focus optics technology also includes two pyroelectric sensors, which deliver twice the standard optical gain. The sensors process multiple signals to deliver precise performance virtually free of false alarms.

### Range adaptive radar

The microwave transceiver automatically adjusts its detection thresholds based on input from the PIR sensors. Integrating the target distance information from the PIR significantly reduces false alarms from the microwave Doppler radar.

**MANTIS Anti-mask technology**

MANTIS (Multi-point Anti-mask with Integrated Spray detection) uses patented prism lenses and active infrared detection to provide industry-leading protection against all known forms of attack. MANTIS complies with the latest worldwide regulatory standards for detecting objects covering or placed in front of the detector. MANTIS is sensitive to materials regardless of texture or color, including fabric, paper, metal, plastic, tape, and spray. When MANTIS identifies a masking material, the detector sends a supervision anti-mask signal to the control panel.

**Active white light suppression**

An internal light sensor measures the level of light intensity directed at the face of the detector. Sensor data fusion technology uses this information to eliminate false alarms from bright light sources.

**Dynamic temperature compensation**

The detector automatically adjusts PIR sensitivity to identify human intruders at critical temperatures. Dynamic temperature compensation detects human body heat accurately, avoids false alarms, and delivers consistent catch performance at all operating temperatures.

**Cover and wall tamper switch**

When an intruder removes the cover or attempts to separate the detector from the wall, a normally-closed contact opens to alert the control panel.

**Self-adjusting LEDs**

The LED brightness adjusts automatically to the surrounding light level. A blue light-emitting diode (LED) indicates TriTech+ alarms and activates during a walk test. A yellow LED indicates microwave detection, and a red LED indicates PIR detection.

**Remote walk test LED**

Users can enter a command through a keypad, a control center, or programming software to remotely enable or disable the walk test LED.

**Alarm memory**

Alarm memory flashes the alarm LED to indicate stored alarms for use in multiple unit applications. A switched voltage from the control panel controls the alarm memory.

**Solid state relays**

Solid state relays send silent alarm output signals to provide a higher level of security and reliability. An external magnet does not activate the relay. The solid state relay uses less current than a mechanical relay, providing longer standby capacity during a power loss.

**Draft, insect, and small animal immunity**

The sealed optic chamber provides immunity to drafts and insects, reducing false alarms. Small animal immunity reduces false alarms caused by animals less than 4.5 kg (10 lb), such as rodents.

**Remote self test**

A remote self test initiates when the walk test input switches to its true state. The alarm relay and alarm LED activate for four seconds following a successful test. The trouble relay activates, and the alarm LED flashes following a failed test.

**Input power supervision**

When the power is lower than 8 V, a low input power trouble condition activates the trouble relay and causes the LED to flash. The trouble condition clears automatically when power reaches or exceeds 8 V.

**Trouble memory**

When the walk test input switches to its true state for less than two seconds, the LED flashes to indicate the most recent trouble condition. If there is no trouble in memory, the LED does not flash. After twelve hours, or after the detector receives a second walk test pulse for two seconds or less, the LED stops flashing and the trouble memory clears.

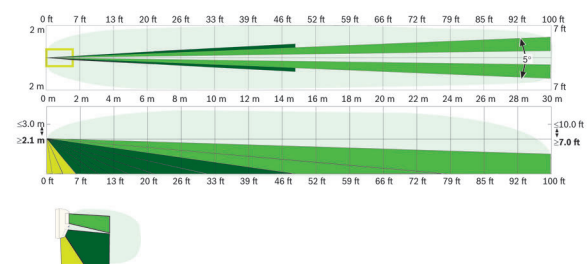
**DIP switch programming**

The following functions are all programmed using DIP switch settings:

- Local Walk Test LED
- Remote Walk Test Input Polarity
- Alarm Memory Polarity
- Long and Short Range Select
- MANTIS Anti-mask On and Off

**Certifications and approvals**

Region	Certification	
Europe	CE	EMC, LVD, R&TTE ISC-PDL1-WAC30G, ISC-PDL1-WAC30H
Sweden	SBSC	ISC-PDL1-WAC30G, Alarm Class 3/4, Environmental Class II (Larmklass 3/4 miljöklass II)
France	AFNOR	ISC-PDL1-WAC30G
	AFNOR	ISC-PDL1-WAC30H

**Installation/configuration notes**

Long-range coverage 30 m x 2.6 m (100 ft x 8.5 ft)

**Mounting**

The recommended mounting height is 2 m to 3 m (7 ft to 10 ft) with no adjustments required. Mount the motion detector level, both horizontally and vertically.

Mounting options:

- On a flat wall (surface, semi-flush), with the optional B335-3 Swiveling low-profile mount, or with the optional B328 Gimbal-mount Bracket
- In a corner (the junction of two perpendicular walls)
- On the ceiling with the optional B338 Universal Ceiling-mount Bracket

**Wiring Considerations**

Recommended wire size is 0.2 mm<sup>2</sup> to 1 mm<sup>2</sup> (26 AWG to 16 AWG).

**Parts included**

Quantity	Component
1	Detector
2	Flat-head screws
2	Screw anchors
1	Nylon cable tie
1	Pattern Mask
1	Installation Guide

**Technical specifications**

**Electrical**

**Power requirements**

Voltage (operating):	9 VDC to 15 VDC
Current (maximum):	< 26 mA with alarm, trouble, and LEDs active
Current (standby):	18 mA at 12 VDC

**Outputs for all models**

Tamper:	Normally-closed (NC) contacts (with cover on) rated at 25 VDC, 125 mA maximum Connect tamper circuit to 24-hour protection circuit
Trouble:	Solid state relay normally-closed (NC) contacts
Alarm relay:	Solid state relay, normally-closed (NC) contacts, power supervised 3 W, 125 mA, 25 VDC, resistance < 10 Ω

**Mechanical**

**Enclosure Design**

Color:	White
Dimensions:	127 mm x 69 mm x 58 mm (5 in. x 2.75 in. x 2.25 in.)
Material:	High-impact ABS plastic

**Indicators**

Alarm indicator:	• Blue LED for TriTech+ alarms
------------------	--------------------------------

	• Yellow LED for microwave alarms
	• Red LED for PIR alarms

**Zones**

Zones:	86
--------	----

**Environmental**

Relative humidity:	0 to 95%, non-condensing
Temperature (operating and storage):	-30°C to +55°C (-22°F to +130°F) <i>For AFNOR certificated installations, -10°C to +55°C (+14°F to +130°F)</i>
Environmental rating (EN 50130-5):	Class II
Protection rating (EN 60529, EN 50102):	IP 41, IK04

**Ordering information**

**ISC-PDL1-WAC30G Professional Series TriTech+ Curtain Motion Detector with Anti-mask**

Provides PIR and microwave, 30 m x 2.6 m (100 ft x 8.5 ft) coverage.

Order number **ISC-PDL1-WAC30G**

**B328 Gimbal-mount Bracket**

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.

Order number **B328**

**B335-3 Swiveling low-profile mount**

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.

Order number **B335-3**

**B338 Universal Ceiling-mount Bracket**

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

**ISC-PDL1-WAC30H Professional Series TriTech+ Curtain Motion Detector with Anti-mask**

Provides PIR and microwave, 30 m x 2.6 m (100 ft x 8.5 ft) coverage. For use in France and the United Kingdom.

Order number **ISC-PDL1-WAC30H**

**B328 Gimbal-mount Bracket**

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.

Order number **B328**

**B335-3 Swiveling low-profile mount**

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.

Order number **B335-3**

### **B338 Universal Ceiling-mount Bracket**

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

---

#### **Accessories**

### **B328 Gimbal-mount Bracket**

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.

Order number **B328**

---

### **B338 Universal Ceiling-mount Bracket**

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338**

---

### **B335-3 Swiveling low-profile mount**

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.

Order number **B335-3**

---

#### **Represented by:**

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
emea.securitysystems@bosch.com  
emea.boschsecurity.com

**Germany:**  
Bosch Sicherheitssysteme GmbH  
Robert-Bosch-Ring 5  
85630 Grasbrunn  
Germany  
www.boschsecurity.com

**North America:**  
Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
onlinehelp@us.bosch.com  
www.boschsecurity.us

**Asia-Pacific:**  
Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia