

# SKA 100 LSN Bolt Contact

www.boschsecurity.com



**BOSCH**  
Invented for life



- ▶ Bolt contact in LSN technology
- ▶ For connecting to an LSN intrusion control panel
- ▶ VdS class C
- ▶ LSN perimeter protection

Bolt contacts are used for monitoring the closure of doors.

## Certifications and approvals

Region	Certification
Germany	VdS G 101009, C SKA 100 LSN G 101009
Europe	CE SKA/SKI LSN

## Installation/configuration notes

### Installation considerations

- Installation is carried out in the door bolt with the bolt contact being activated by the tongue of the lock. It should be kept in mind that only the second turn of the key in the lock actually activates the contact. To make any necessary adjustments, the bolt contact's operating spring lever can be bent.
- When installing in fire protection doors, please ensure that no mechanical changes, except for the fastener bores, are carried out on the door frames.

### Connecting LSN contacts

- Each LSN contact is a physical LSN element (1 out of 127 possible per loop).


- The length of LSN contact connection cables must be included when planning the total line length of the LSN loop, as LSN technology is incorporated in these detectors.
- Passive coupling elements for joining the connection cables to the installation cable must be placed as close as possible to the LSN contacts. The 1 m connection cable with 2 m LSN cable length is included in the calculation of the LSN cable length (LSN is carried into the contacts and back out again).
- Connector boxes (optional) are classified as installation material.

### Local Security Network LSN

In case of wire breakage/short circuit all LSN – elements in the LSN Ring remain under observation. In this case, the system automatically builds two transmission lines which undertake the observation from both sides to the defective location.

### Testing LSN contacts

- Reed switch and microswitch functions can be checked before installation by a high-Ohm multimeter or continuity checker (for diode paths).
- The resistance values are approximate values; a large change in resistance is significant here.

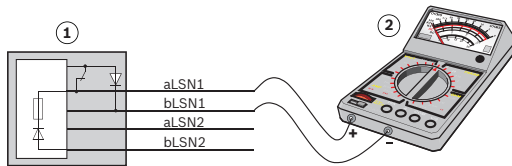

- 1 Detector
- 2 High-Ohm multimeter  
Contact open: approx. 3 megaohm  
Contact closed: approx. 1 megaohm

Only the intrusion contact can be checked in this way. The tamper switch of the Class C magnetic contact can be checked by the LSN control panel or with the LSN testing device (software version 3.x onward).

### Parts included

Type	Qty.	Component
SKA 100 LSN	1	Bolt contact for perimeter doors, with cable

### Technical specifications

Type of installation	Flush
LSN operating voltage	15 V to 33 V
Current consumption	0.4 mA
VdS environmental class	III
Protective system	IP 67
Permitted ambient temperature	-25 °C to +70 °C
Enclosure	
• Material	Steel plate
• Color	Gray
Dimensions (H x W x D)	
• Without operating lever	37 x 9 x 19 mm
• With operating lever	74 x 10 x 19 mm
• Connection cable	Ø 3.2 mm, length 4 m
Wire colors	aLSN1: green bLSN1: brown aLSN2: green bLSN2: yellow

### Ordering information

#### SKA 100 LSN Bolt Contact

For monitoring perimeter door closure  
Order number **4998014066**

#### Accessories

##### Small surface-mounted connector box, cover

Order number

##### 3-pin cable connector

Order number

##### Small surface-mounted connector box, base

Order number

##### Cable binder grips (for magazine operation)

Order number

##### Large surface-mounted connector box, base

Order number

##### Flush-mounted X55 connector box, cover

Order number

##### Cable binder grips (single binder operation)

Order number

##### Large surface-mounted connector box, cover

Order number

##### Flush-mounted X55 connector box, base

Order number

##### 2-pin cable connector

Order number

**Represented by:**

**Americas:**

Bosch Security Systems, Inc.  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
security.sales@us.bosch.com  
www.boschsecurity.us

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security  
Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

**China:**

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

**America Latina:**

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
latam.boschsecurity@bosch.com  
www.boschsecurity.com