

SKI 100 LSN Bolt Contact

www.boschsecurity.com



BOSCH
Invented for life



- ▶ Bolt contact in LSN technology
- ▶ For connecting to an LSN intrusion control panel
- ▶ VdS class C
- ▶ LSN perimeter protection

Bolt contacts are used for monitoring the closure of doors.

Certifications and approvals

Region	Certification
Germany	VdS G 101010, C SKI 100 LSN G 101010
Europe	CE SKA/SKI LSN

Installation/configuration notes

Installation considerations

- Installation is carried out in the door bolt with the bolt contact being activated by the tongue of the lock. It should be kept in mind that only the second turn of the key in the lock actually activates the contact. To make any necessary adjustments, the bolt contact's operating spring lever can be bent.
- When installing in fire protection doors, please ensure that no mechanical changes, except for the fastener bores, are carried out on the door frames.

Connecting LSN contacts

- Each LSN contact is a physical LSN element (1 out of 127 possible per loop).


- The length of LSN contact connection cables must be included when planning the total line length of the LSN loop, as LSN technology is incorporated in these detectors.
- Passive coupling elements for joining the connection cables to the installation cable must be placed as close as possible to the LSN contacts. The 1 m connection cable with 2 m LSN cable length is included in the calculation of the LSN cable length (LSN is carried into the contacts and back out again).
- Connector boxes (optional) are classified as installation material.

Local Security Network LSN

In case of wire breakage/short circuit all LSN – elements in the LSN Ring remain under observation. In this case, the system automatically builds two transmission lines which undertake the observation from both sides to the defective location.

Testing LSN contacts

- Reed switch and microswitch functions can be checked before installation by a high-Ohm multimeter or continuity checker (for diode paths).
- The resistance values are approximate values; a large change in resistance is significant here.

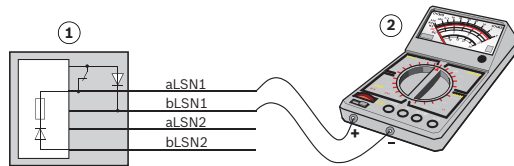

- 1 Detector
- 2 High-Ohm multimeter
Contact open: approx. 3 megaohm
Contact closed: approx. 1 megaohm

Only the intrusion contact can be checked in this way. The tamper switch of the Class C magnetic contact can be checked by the LSN control panel or with the LSN testing device (software version 3.x onward).

Parts included

Type	Qty.	Component
SKI 100 LSN	1	Bolt contact for interior doors, without cable

Technical specifications

Type of installation	Flush
LSN operating voltage	15 V to 33 V
Current consumption	0.4 mA
VdS environmental class	II
Protective system	IP 54
Permitted ambient temperature	-25 °C to +55 °C
Enclosure	
• Material	Steel plate
• Color	Gray
Dimensions (H x W x D)	
• Without operating lever	37 x 10 x 19 mm
• With operating lever	74 x 10 x 19 mm
• Connection cable	None

Ordering information

SKI 100 LSN Bolt Contact

For monitoring interior door closure

Order number **4998014065**

Accessories

3-pin cable connector

Order number

Small surface-mounted connector box, base

Order number

Cable binder grips (for magazine operation)

Order number

Flush-mounted X55 connector box, cover

Order number

Large surface-mounted connector box, cover

Order number

Cable binder grips (single binder operation)

Order number

Flush-mounted X55 connector box, base

Order number

Large surface-mounted connector box, base

Order number

2-pin cable connector

Order number

Small surface-mounted connector box, cover

Order number

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com