IP Video Surveillance VN2016(1U) **Network Video Recorder**







Overview

VIDEOTEKNIKA 2000 Series is a reliable range of Network Video Recorders with Full HD 1080p local display capability and recording benchmark of up to 5 Megapixel. The VN2016(1U) ensures unleveled video recording quality in multiple applications on an open platform in live and also in playback. The VN2016(1U) has a standard availability of 2 Hard Disks bays allowing recording capacity of up to 12TB. Backup facility is available via the network ports through the VVMS and allows for local backups via USB.

Supported Cameras

The VN2O16(1U) supports all Videoteknika IP Cameras and is fully compatible with our Videoteknika's VVMS Software. The VN2O16(1U) functions on an open platform policy allowing for various 3rd party IP camera integration. Within the Videoteknika range various video encoders and video decoders are available to further more expand the flexibility for the system integrator and ensure total system synchronization. Each channel on-board the NVR allows for dual streaming with the mainstream supporting up to 5MP of record-ing resolution.

Storage Features

The VN2O16(1U) allows for individual channel recording allocation ensuring the right data capacity is assigned through the relative camera depending on its streaming resolution. Instant playback is also possible via the Videoteknika reverse instant playback capability which is unique to Videoteknika NVRs. Digital zooming while live or playback is standard with any high resolution recording camera.

Supported Software

The NVR is supported by the Videoteknika VVMS-Xpert[™] VMS. The VVMS-Xpert[™] VMS is a modular Video Management Software dedicated for Videoteknika IP cameras expandable up to 1024 Channels per server. A 64 Ch version VVMS-Advanced[™] is supplied as a free bundled software with all Videoteknika IP Cameras. VVMS-Mobile[™] is also available on Iphone and Android applications. Videoteknika IP cameras are supported by various leading software development VMS partners.

Main Features

- Recording Quality up to 5MP
- 2–Way Audio
- Up to 12 Terabytes of Hard Disk space
- Self Adaptive 10m/100m/1000m network interface
- H.264 video compression
- Dual Simultaneous Streaming
- Simultaneous HDMI & VGA outputs
- HDMI & VGA (Full HD 1080p) output
- Local Data Export via USB
- Network backup export via Videoteknika VVMS software
- Multiple level users Administrator / User 1 / User 2 (programmable)
- Privacy Masking
- Videoteknika VVMS-Advanced[™] VMS software included
- Videoteknika VVMS-Mobile[™] supported on App Store



IP Video Surveillance VN2016(1U) **Network Video Recorder**


Specifications

| NVR Model | VN2016(1U) | |
|---|--|--|
| Features | | |
| IP Video Input | 16–Channels | |
| Two–way Audio | 1–ch, BNC (2.0 Vp–p, 1kΩ) | |
| Recording Resolution | 5MP/3MP/1080P/UXGA/720P/ | |
| | VGA /4CIF /DCIF /2CIF /CIF /QCIF | |
| HDMI Output | 1–ch, resolution: 1920 x 1080P / 60Hz, | |
| | 1920 x 1080P / 50Hz, 1600 x 1200 / 60Hz, | |
| | 1280 x 1024 / 60Hz, 1280 x 720 / 60Hz, | |
| | 1024 x 768 / 60Hz | |
| VGA Output | 1–ch, resolution: 1920 x 1080P / 60Hz, | |
| 1600 x 1200 / 60Hz, 1280 x 1024 / 60 | | |
| | 1280 x 720 / 60Hz, 1024 x 768 / 60Hz | |
| Audio Output | 1–ch, BNC (Linear, 600Ω) | |
| Playback Resolution | 5MP / 3MP / 1080P / UXGA / 720P / | |
| | VGA /4CIF /DCIF /2CIF /CIF /QCIF | |
| Synchronous Playback 16-Channels | | |
| SATA | 2 SATA interfaces | |
| Capacity Each interface supports up to 6TB capacity for recording | | |

| NVR Model | VN2016(1U) | | |
|---------------------------|---|--|--|
| Features (Continue |) | | |
| Network Interface | 1 RJ-45 10 / 100 / 1000 Mbps self-adaptive | | |
| | Ethernet interface | | |
| Serial Interface | 1 RS–232, 1 RS–485 & 1 RS–485 keyboard | | |
| USB Interface | 2, USB 2.0 | | |
| | | | |
| Environmental | | | |
| Working Temperature | ing Temperature -10°C ~+55°C | | |
| Working Humidity | 10 % ~ 90 % | | |
| Electrical | | | |
| Power Supply | 100 ~ 240 VAC, 6.3 A, 50 ~ 60 Hz | | |
| Power Consumption | ≤ 13W | | |
| Physical | | | |
| Dimensions (mm) | 445 (W) x 261 (D) x 44.5 (H) | | |
| Chassis | 19-inch rack-mounted 1U chassis | | |
| Weight | \leq 4 Kg (13.09 lb) (without HDD or DVD-R/W) | | |
| Regulatory Certifications | FCC, CE, C-TICK, UL | | |
| | | | |

XX VIDEOTEKNIKA

Technical Diagram

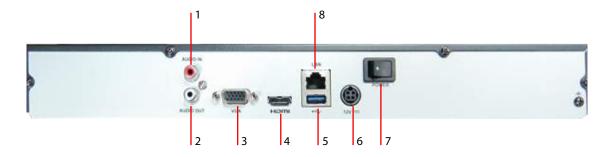

| Real Panel | Real Panel (Continue) |
|-------------------|--------------------------|
| 1. Audio In | 7. Power Switch |
| 2. Audio Out | 8. LAN Network Interface |
| 3. VGA Interface | |
| 4. HDMI Interface | |
| 5. USB Interface | |
| 6. DC12V | |



IP Video Surveillance VN2016(1U) **Network Video Recorder**



Ordering Information

| NVR Model | Network Video Recorder Details | |
|---|--|--|
| VN2016(1U) | 16–Ch, D1 to 5MP Recording Quality (Depending on Storage & Bandwith Requirements), Up to Max. 12TB of HDD spac | |
| H.264, Dual Streaming, Simultaneous HDMI & VGA outputs, Local Data Export, Network Backup | | |

Recommended Associated Products







| VVMS-Advanced [™] | VVMS-Xpert [™] | VVMS-Mobile [™] |
|----------------------------|---------------------------|--------------------------|
| Video Management Software | Video Management Software | Mobile Application |
| 64 Channel | 1024 Channel | |
| Mobile Application | Mobile Application | |

Affiliations:





Partners:



















VIDEOTEKNIKA SRL – SANSEPOLCRO (AR) VIA DEL PETRETO 4 CAP 52037Videoteknika SRL (Perugia) Registered in Chambers of Commerce, Arezzo, Italy. Registration No. 21761Website: www.videoteknika.comEmail : sales@videoteknika.com