

SCB-6003

1080p Analog HD Camera




* Lens not included

Key Features

- Full HD (1920 x 1080, 30fps) resolution
- 0.04 Lux@F1.2 (Color), 0.004 Lux@F1.2 (B/W)
- Day & Night (ICR), DWDR, SSSNRIV, Motion detection
- Transmission distance max. 500m
- Easy Installation (Plug & play), Dual power, RS-485

Dimensions

Unit : mm (inch)

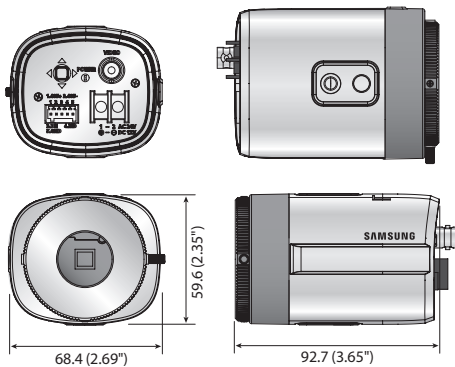

SCB-6003N/P	
VIDEO	
Imaging Device	1/3" 2M CMOS
Total Pixels	1,956(H) x 1,266(V) 2.47M pixels
Effective Pixels	1,944(H) x 1,092(V) 2.12M pixels
Scanning System	Progressive scan
Min. Illumination	Color : 0.04 Lux (F1.2) B/W : 0.004 Lux (F1.2)
S / N Ratio	52dB (AGC Off, Weight On)
Video Output	BNC (AHD, CVBS selectable)
Resolution	1920 x 1080
Max. Framerate	30fps@1080p
LENS	
Mount Type	C / CS
OPERATIONAL	
On Screen Display	English, Japanese, Spanish, French, Portuguese, Korean, German, Italian, Russian, Polish, Czech, Romanian, Serbian, Swedish, Danish, Turkish
Camera Title	Off / On (Displayed 15 Characters)
Day & Night	Auto (ICR) / External / Color / B/W
Backlight Compensation	Off / User BLC / HLC
Wide Dynamic Range	DWDR
Digital Noise Reduction	SSNRIV (Off / On)
Defog	Off / Auto / Manual
Motion detection	Off / On (4 zones)
Privacy Masking	Off / On (4 zones rectangle)
Gain Control	Off / Low / Middle / High / Very High
White Balance	ATW / Outdoor / Indoor / Manual / AWC (1,800K ~ 10,500K)
Electronic Shutter Speed	1sec ~ 1/12,000sec
Reverse	Off / H-Rev / V-Rev / HV-Rev
Profile	Basic, Day & Night, Backlight, Indoor, User
Alarm	(MD) Output 1, External D/N 1
Remote Control Interface	Coaxial control, RS-485
Protocol	Coax : NTSC/PAL - Samsung CCVC, Pelco-C (Coaxitron), AHD - ACP (AHD Coax Protocol) RS-485 : Samsung-T/E, Pelco-D/P, Panasonic, Bosch, Honeywell, Vicon, AD, GE
Video Transmission Distance	500m (1,640.42ft) (75-5 coaxial cable)
ENVIRONMENTAL	
Operating Temperature / Humidity	-10°C ~ +55°C (+14°F ~ +131°F) / Less than 90% RH
ELECTRICAL	
Input Voltage / Current	Dual (24V AC & 12V DC ±10%)
Power Consumption	Max. 4.2W
MECHANICAL	
Color / Material	Black, Ivory / Aluminum, Plastic
Dimensions (WxHxD)	68.4 x 59.6 x 92.7mm (2.69" x 2.35" x 3.65")
Weight	175.5g (0.39 lb)

* The latest product information / specification can be found at hanwha-security.com
* Design and specifications are subject to change without notice.

Available Lenses / Accessories (Optional)

